

POLYOLEFIN CASTERS

- Rolls easily on most floors
- Lightweight and economical
- Non-marking, easy to maintain, steam cleanable
- High impact strength
- Superior resistance to most oils, chemicals, grease and acids

Model No.	Wheel Dia."	Style	Cap. lbs.	Tread Width"	Overall Height"	Price /Each
ML391	3	Swivel	250	1-1/4	4-1/2	
ML392	3	Rigid	250	1-1/4	4-1/2	
ML393	4	Swivel	250	1-1/4	5-1/4	
ML394	4	Rigid	250	1-1/4	5-1/4	
ML395	5	Swivel	250	1-1/4	6-1/8	
ML396	5	Rigid	250	1-1/4	6-1/8	

BLUE ELASTIC RUBBER CASTERS

- High load capacity, rolls easily and quietly on all floors
- Non-marking, excellent floor protection
- Zinc chrome plated finish provides corrosion resistance
- Elastic rubber tread rejects floor debris
- Sealed double ball raceway
- Thread guards
- Ball bearing
- Total locking brake locks the wheel and keeps the swivel from turning

Model No.	Wheel Dia."	Style	Cap. lbs.	Tread Width"	Overall Height"	Price /Each
M0511*	3	Swivel	285	1-1/4	4-1/4	
M0512*	3	Rigid	285	1-1/4	4-1/4	
M0513*	3	Swivel w/Brake	285	1-1/4	4-1/4	
ML333	4	Swivel	350	1-3/8	5	
ML334	4	Rigid	350	1-3/8	5	
ML342	4	Swivel w/Brake	350	1-3/8	5	
ML337	5	Swivel	400	1-3/8	6	
ML338	5	Rigid	400	1-3/8	6	
ML345	5	Swivel w/Brake	400	1-3/8	6	

* Roller Bearing

NYLON SANDWICH CASTERS

- Non-marking white nylon elastic rubber cushion ring layer reduces noise and vibration
- Chrome zinc-finish for corrosion resistance
- Double raceway
- Ball bearing
- Total locking brake locks the wheel and keeps the swivel from turning

Model No.	Wheel Dia."	Style	Cap. lbs.	Tread Width"	Overall Height"	Price /Each
MN441	4	Swivel	440	1-3/8	5-1/8	
MN442	4	Rigid	440	1-3/8	5-1/8	
MN443	4	Swivel W/Brake	440	1-3/8	5-1/8	
MN444	5	Swivel	440	1-3/8	6-1/8	
MN445	5	Rigid	440	1-3/8	6-1/8	
MN446	5	Swivel W/Brake	440	1-3/8	6-1/8	

SURFACE APPLICATIONS:

Concrete, brick, carpet and steel

Plate size: 2-5/8" x 3-3/4"
Bolt hole centres: 2-3/4" x 1-3/4"
Bolt hole size: 5/16"

KLETON



ML391

ML394



ML342

ML333

SURFACE APPLICATIONS:


Concrete, brick, carpet, steel, tile, asphalt, wood and linoleum

Plate size: 3-3/8" x 4"
Bolt hole centres: 2-3/8" x 3-1/8"
Bolt hole size: 3/8"

KLETON



ML334

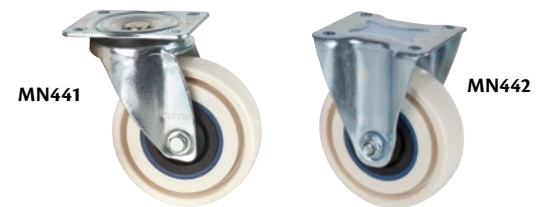

MN441

MN442

SURFACE APPLICATIONS:

Concrete, brick, carpet and steel

Plate Size: 3-1/3" x 4-1/8"
Bolt hole centres: 3-1/8" x 2-1/3"
Bolt hole size: 5/16"

KLETON



MN443

KLETON

POLYURETHANE CASTERS

- Smooth rolling, low noise operation
- Non-marking, cut & tear resistant
- Die cast aluminum core with brown polyurethane tread
- Resistant to most chemicals, moisture friendly
- Double ball raceway
- Annular ball bearing
- Total locking brake locks the wheel and keeps the swivel from turning
- Butterfly side brake locks the wheel preventing it from rolling

Model No.	Wheel Dia."	Style	Cap. lbs.	Tread Width"	Overall Height"	Price /Each
ML044	3	Swivel	230	1-1/4	4-1/4	
ML043	3	Rigid	230	1-1/4	4-1/4	
ML045	4	Swivel	440	1-1/2	5-3/8	
ML046	4	Rigid	440	1-1/2	5-3/8	
ML441	4HD	Swivel	550	1-5/8	5-5/8	
ML442	4HD	Rigid	550	1-5/8	5-5/8	
MN264	4HD	Swivel w/brake	550	1-5/8	5-5/8	
ML397	5	Swivel	650	1-1/2	6-1/2	
ML398	5	Rigid	650	1-1/2	6-1/2	
MN265	5	Swivel w/brake	650	1-1/2	6-1/2	
ML399	6	Swivel	850	1-1/2	7-1/2	
ML400	6	Rigid	850	1-1/2	7-1/2	
MN266	6	Swivel w/brake	850	1-1/2	7-1/2	
MN449	6	Butterfly side brake	850	1-1/2	7-1/2	
ML401	8	Swivel	1000	1-5/8	9-1/2	
ML402	8	Rigid	1000	1-5/8	9-1/2	
MN267	8	Swivel w/brake	1000	1-5/8	9-1/2	
MN450	8	Butterfly side brake	1000	1-5/8	9-1/2	

SURFACE APPLICATIONS:

Concrete, brick, carpet, steel, tile, asphalt, wood and linoleum

Plate size: 3 = 2-5/8" x 3-3/4"
 4 = 3-1/8" x 4-1/8"
 4 HD = 4" x 4-1/2"
 5 = 4" x 4-1/2"
 6 = 4" x 4-1/2"
 8 = 4" x 4-1/2"

Bolt hole centres: 3 = 1-3/4" x 2-3/4"
 4 = 2-3/8" x 3-1/16"
 4 HD = 3-1/4" x 2-3/4"
 5 = 3-1/4" x 2-3/4"
 6 = 3-1/4" x 2-3/4"
 8 = 3-1/4" x 2-3/4"

Bolt hole size: 3 = 5/16"
 4 = 5/16"
 4 HD = 3/8"
 5 = 3/8"
 6 = 3/8"
 8 = 3/8"



ML043

ML044

MN264